

Codice - Code:

EA3006
PALOMA Ø34 shut-off with stop valve and shower bracket

Descrizione - Description:

Rubinetto d'arresto da 1/2" M e supporto doccia con doccia a pulsante in ABS e flessibile cm 125

1/2" M Stop valve and shower bracket with ABS shut-off handspray and hose 125 cm

Tecnologia - Technology:



Stoppventil 1/2" a.G und Braseusehalter mit hygienischer Handbrause aus ABS und Schlauch cm 125

Robinet d'arrêt 1/2" M et support douchette avec douchette d'arrêt en ABS et flexible cm 125

Llave de paso 1/2" M y soporte mango ducha con mango ducha higiénico ABS y flexible cm 125

Запорный кран на 1/2" M с лейкой из АБС клапаном подачи и шлангом 125 см

Immagine Prodotto - Product Image



Disegni - Drawings


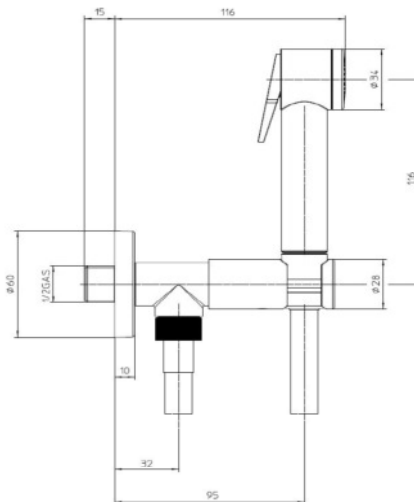


Grafico di portata - Flow rate diagram

	STOP VALVE	HDSHWR
0	0,0	0,0
0,5	10,2	7,8
1	13,8	10,9
1,5	16,6	13,6
2	18,8	16,0
2,5	20,7	18,1
3	22,2	20,1
3,5	23,5	22,0
4	24,7	23,7
4,5	25,9	25,5
5	27,1	27,2
pressione bar	portata L/min	

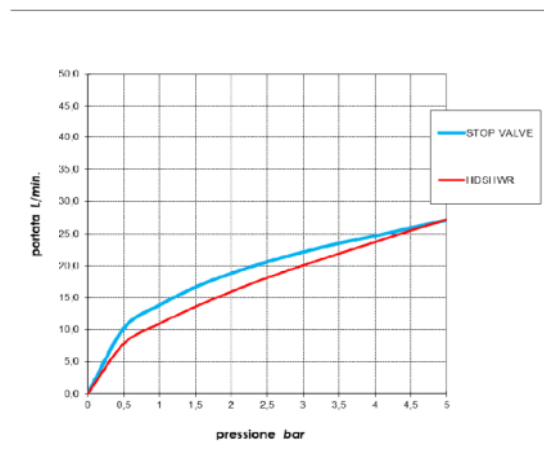

Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers	
min	1 bar	8 L/min	Blocco di sicurezza Safety lock	--
max	5 bar	27 L/min	Temperatura acqua fredda Cold water temperature	--
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performance		10 L/min	Temperatura acqua calda Hot water temperature	--

Materiali - Materials

Rubinetto d'arresto EA3000: Ottone
Rosone: ABS
Doccia a pulsante B00442: ABS
Flessibile A00158: Connettori in ottone con tubo in PVC+Nylon

Stop valve EA3000: Brass
Wall rosette: ABS
Shut-off handspray B00442: ABS
Hose A00158: Brass connectors with PVC+Nylon tube

Certificazioni - Certifications

B00442:



A00158:



Conformità' - Conformity

Chrome plating - EN 248; Tap - EN 817.

--