

**DESCRIZIONE - BESCHREIBUNG - DESCRIPTION**

Testa termostatica con sensore a liquido  
 Thermostatkopf mit Flüssigkeitssensor  
 Thermostatic head with liquid sensor



2TT CC



2TTBB




2TTNN

P. Max 10 bar  
 T. Max 100°C

**CARATTERISTICHE - EIGENSCHAFTEN - FEATURES**

- |  |         |   |         |
|--|---------|---|---------|
| <ul style="list-style-type: none"> <li>• Tempo di risposta<br/>Schließzeit<br/>Response time</li> </ul>  | 26 min  | <ul style="list-style-type: none"> <li>• Isteresi,<br/>Hysterese,<br/>Hysteresis,</li> </ul>  | 0.5 K   |
| <ul style="list-style-type: none"> <li>• Influenza della pressione differenziale<br/>Differenzdruckeinfluss<br/>Differential pressure influence</li> </ul> | 0.80 K  | <ul style="list-style-type: none"> <li>• Influenza della temperatura dell'acqua<br/>Wassertemperatureinfluss<br/>Water temperature influence</li> </ul> | 0.80 K  |
| <ul style="list-style-type: none"> <li>• Max pressione differenziale<br/>Max. Differenzdruck<br/>Max differential pressure</li> </ul>                      | 1.0 bar | <ul style="list-style-type: none"> <li>• Portata nominale<br/>Nenndurchfluss<br/>Nominal flow rate</li> </ul>   | 190 l/h |

**DIMENSIONI PRINCIPALI - HAUPTABMESSUNGEN - LEADING DIMENSIONS**

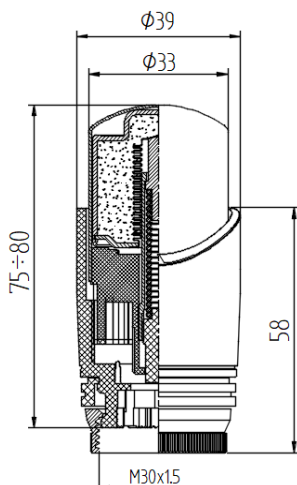

Campo regolazione temperatura  
 Temperatureinstellbereich  
 Field temperature control

