

DESCRIZIONE - BESCHREIBUNG - DESCRIPTION

Raccordo compressione tenuta o-ring per tubo multistrato.
 Klemmringverschraubungen mit O-Ring für
 Mehrschichtverbundrohr.
 Compression fittings with O-ring for multi-layer pipe.



CARATTERISTICHE - EIGENSCHAFTEN - FEATURES


- Calotta e anello in ottone / Mutter und Klemmring aus Messing / Brass nut and ring
- O-ring in EPDM / EPDM O-ring / EPDM o-ring
- Anello in PTFE / PTFE ring / PTFE ring

Pressione di esercizio
 Betriebsdruck 10bar
 Working pressure

Temperatura di esercizio
 Betriebstemperatur -20°C +110°C
 Working temperature

DIMENSIONI PRINCIPALI - ABMESSUNGEN - LEADING DIMENSIONS

	DESCRIZIONE	BESCHREIBUNG	PART NAME
1	CALOTTA	MUTTER	NUT
2	ANELLO TAGLIATO	KLEMMRING	CUTTED RING
3	CORPO	GEHÄUSE	BODY
4	ORING EDPM	EPDM O-rings	EPDM O-rings
5	ORING EDPM	EPDM O-ring	EPDM O-ring
6	ANELLO in PTFE	PTFE ring	PTFE ring

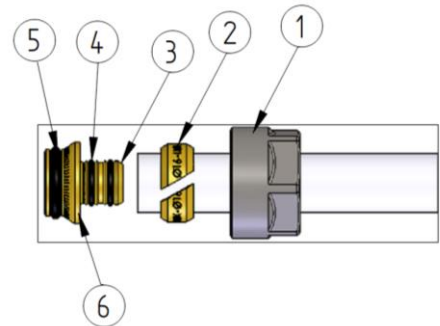

Coppia di serraggio multistrato PEX-AL-PEX: 25-35 Nm
 Anziehdrehmoment für Verbundrohr PEX-AL-PEX: 25-35 Nm
 Multilayer clamping torque PEX-AL-PEX: 25-35 Nm

