

**Description**

Medium strength anaerobic adhesive for thread locking of nuts and bolts of all types that require to be dismantled. Suitable to be used on oily surfaces.

Highly resistant to heat, corrosion, vibrations, water, gas, oils, hydrocarbons and many chemicals.

Proven unscrewing resistance at +200°C.

Approved as gas-tight sealant for threaded fittings according to the European norm EN 751-1 (DVGW nr. NG-5146AU0399 and GAZ DE FRANCE).

Approved for potable water (TZW - DVGW).

It keeps sealing properties unchanged between -55°C/+200°C and up to +250°C for short times.

**Physical properties**

Composition : anaerobic methacrylate resin  
 Colour : blue  
 Viscosity (+25°C - mPa s) : 1.700 - 9.000 thixo  
 Friction coefficient  $\mu$  : about 0,10  
 Specific weight (+25°C - g/ml) : 1,07  
 Fluorescence : under blue light  
 Flash point : > +100°C  
 Shelf life +25°C : 1 year in original unopened packaging  
 Max diameter of thread/gap filling : M36/0,25 mm

**Curing performance**

Curing rate depends on the assembly gap, substrates and temperature. Functional strength is usually reached in 1 - 3 hours and full curing takes 24 - 36 hours. In case of passive surfaces and/or low temperature a fast cure can be obtained using Loxeal activator 11, even if its use may reduce the final strength

**Curing properties (typical)**


Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d at +25°C  
 Handling cure time : 10 - 20 minutes  
 Functional cure time : 1 - 3 hours  
 Full cure time : 3 - 6 hours  
 Locking torque (ISO 10964)  
 - breakaway : 18 - 23 N m  
 - prevail : 9 - 16 N m  
 Shear strength (ISO 10123) : 9 - 13 N/mm<sup>2</sup>  
 Temperature range: -55 / +200°C

**Environmental resistance**

**Hot strength**


The graph below shows the mechanical strength vs. temperature.

ISO 10964 - Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d at +25°C - pre-torque 5 N m

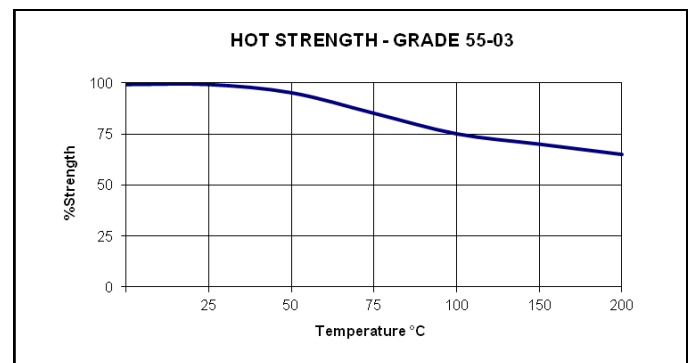


**Cure speed v substrate**

The graph hereunder shows the breakaway strength development of the product (with time) on steel nuts/bolts M10 x 20 in comparison with several substrates. Tested in accordance with ISO 10964 at + 25°C.

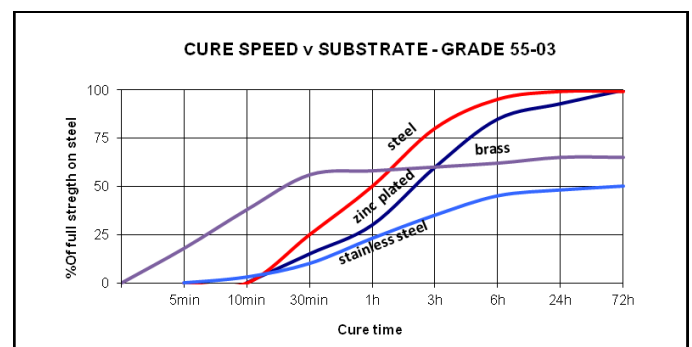


**Cure speed v gap**

The graph below shows the product shear strength (as %) at different increasing controlled gaps. Steel pins/collars, tested in accordance with ISO 10123 at + 25°C.

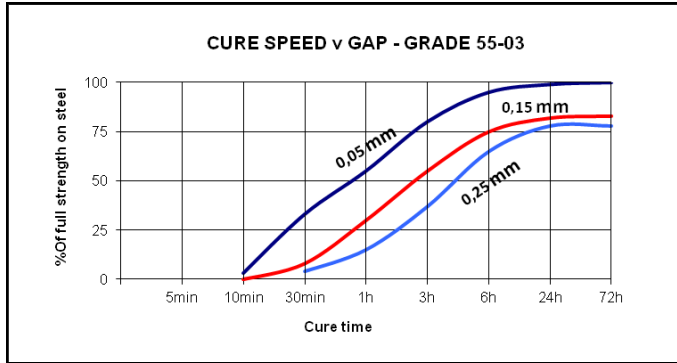


**Cure speed v temperature**

The following graph shows the breakaway strength of the product (as %) at different temperatures. Steel nuts/bolts M10 x 20, tested according to ISO 10964

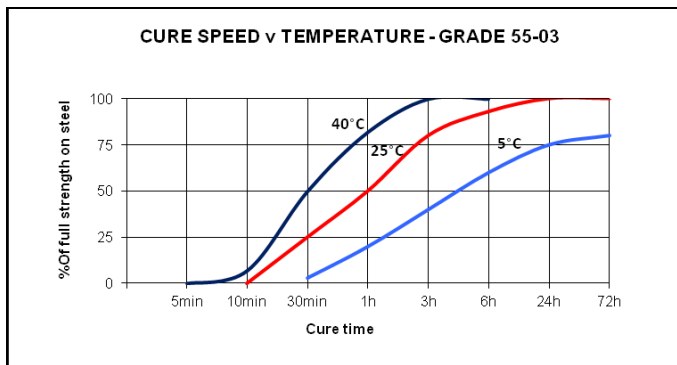


**Cure speed v activator**

Polymerization could be slowed down by substrate nature, large gaps; cure speed can be improved by applying appropriate activator to the substrate(s). The following graph shows the breakaway strength of the product (as %) and the cure speed developments using our activator 11 and 18 respectively, compared to the ones with no activator. Zn nuts/bolts M10 x 20, tested according to ISO 10964 at a temperature of + 25°C.

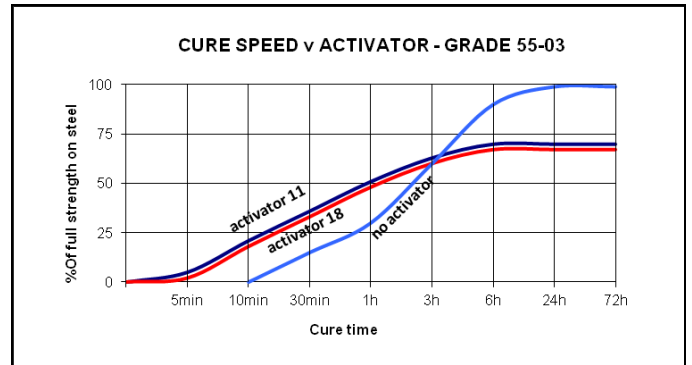

**Heat aging**

The graph below shows the strength resistance behavior as a function of temperature/time. Zn nuts/bolts M10 x 20 - (pre-torque of 5 N m, cured 7 days at +25°C) - aged at temperature indicated and tested at +25°C according to ISO 10964.

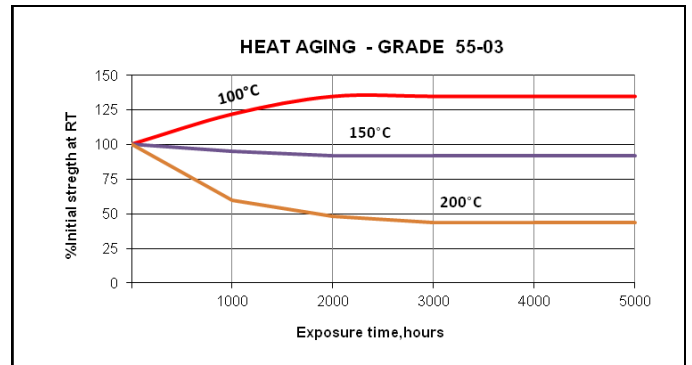

**Chemical resistance**

Aged at indicated temperature under conditions below after 24 hours from polymerization.

Substance	°C	Resistance after 100 h	Resistance after 1000 h	Resistance after 5000 h
Motor oil	125	excellent	excellent	excellent
Gear box oil	125	excellent	excellent	excellent
Gasoline	25	excellent	good	good
Water/glycol 50%	87	excellent	good	good
Brake fluid	25	excellent	excellent	good
Ethanol	25	excellent	excellent	excellent
Acetone	25	good	good	good
Biodiesel	25	excellent	excellent	excellent

Motor oil	125	excellent	excellent	excellent
Gear box oil	125	excellent	excellent	excellent
Gasoline	25	excellent	good	good
Water/glycol 50%	87	excellent	good	good
Brake fluid	25	excellent	excellent	good
Ethanol	25	excellent	excellent	excellent
Acetone	25	good	good	good
Biodiesel	25	excellent	excellent	excellent

For information on resistance with other chemicals, contact Loxeal Technical Service

**Directions for use**

The product is recommended for use on metal substrates. Clean and degrease parts before bonding with Loxeal Cleaner 10.

Apply product to fill completely the gap, assemble parts and hold on for curing time. Liquid product can damage coating, some plastics and elastomers and late stress-cracking events might be induced if used with some thermoplastics.

For application on non metal materials, contact Loxeal Technical Service. For disassembly, use normal tools and eventually heat pieces at +150°C/+250°C, remove any residue of cured product mechanically and clean parts with Acetone

**Storage**

Keep product in a cool and dry room at no more than +25°C. To avoid contaminations do not refill containers with used product. For further information on applications, storage and handling contact Loxeal Technical Service

**Safety and handling**

Consult Material Safety Data Sheet before use.

**Note**

The data contained herein, obtained in Loxeal laboratories, are given for information only; if specifics are required, please contact Loxeal Technical Department. Loxeal ensures abiding quality of supplied products according to its own specifics. Loxeal cannot assume responsibility for the results obtained by others which methods are not under Loxeal control. It is user's responsibility to determine suitability for user's purpose of any product mentioned herein. Loxeal disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Loxeal products. Loxeal specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.