

eBlitz Wi-Fi

ELEKTRISCHER HEIZKÖRPER MIT WÄRMETRAGENDER FLÜSSIGKEIT



- ▶ **Fernbedienbarer Heizkörper über Android- und Apple-Smartphones**
- ▶ **Kompatibel mit Google Home und Alexa**
- ▶ **Körper aus Aluminium:**
 - erreicht schnell die gewünschte Temperatur
- ▶ **Integrierte hintergrundbeleuchtete LCD-Schnittstelle**
- ▶ **NTC-Temperaturfühler und elektronische Temperaturregelung**
- ▶ **Zur Optimierung des Verbrauchs verfügt der Heizkörper über:**
 - Tages- oder Wochenprogrammierung mit adaptiver Heizsteuerung
 - Erfassungsfunktion eines geöffneten Fensters
 - Verbrauchsmessung
- ▶ **Sicherheit:**
 - Tastatursperre
 - Eingebauter EIN/AUS-Schalter
 - Gangreserve > 2h

 alexa

 works with the Google Assistant

CE

CLASSE II




Double isolation



In der rechten Seite sind das Einstell- und Steuersystem mit digitaler Anzeige und leicht zugänglichen Tasten - unabhängig von der Installationsart - angeordnet.



Inklusive Befestigungssystem



Steuerdraht

Typ	Artikelnummer der Steuerdraht	Leistung	Glieder	Spannung	Frequenz	Breite	Höhe	Bautiefe
		W	Anz.	V	Hz	mm	mm	mm
750	FBG0M1XR84	750	4	230	50/60	390	583	80
1000	FBG0M1XRA5	1000	5	230	50/60	470	583	80
1250	FBG0M1XRD7	1250	7	230	50/60	630	583	80
1500	FBG0M1XRF9	1500	9	230	50/60	790	583	80
1800	FBG0M1XRIB	1800	11	230	50/60	950	583	80


Auf alle Modelle **eBlitz Wi-Fi** wird ab dem Installationsdatum eine Garantie für Schäden, die auf Herstellungsfehler zurückzuführen sind, geleistet: **2 Jahre** auf elektrische Komponenten und **10 Jahre** auf den Aluminiumheizkörper.




BRAND: FONDITAL **MODEL:** eBLITZ Wi-Fi **LAST UPDATED:** 12/01/21

REF.	DESCRIPTION	OUTPUT	VOLTAGE	FREQ.	TYPE	INTERFACE
		W	V	Hz		
FBGOM1XR84	eBlitz Wi-Fi 750 W Pilot wire	750	230	50/60	Fluide	Integrated control with display
FBGOM1XRA5	eBlitz Wi-Fi 1000 W Pilot wire	1000	230	50/60	Fluide	Integrated control with display
FBGOM1XRD7	eBlitz Wi-Fi 1250 W Pilot wire	1250	230	50/60	Fluide	Integrated control with display
FBGOM1XRF9	eBlitz Wi-Fi 1500 W Pilot wire	1500	230	50/60	Fluide	Integrated control with display
FBGOM1XRIB	eBlitz Wi-Fi 1800 W Pilot wire	1800	230	50/60	Fluide	Integrated control with display

STANDARDS	SEASONAL SPACE HEATING ENERGY EFFICIENCY
CE, ERP-Ecodesign Compliance	$\eta_s = 40\%$

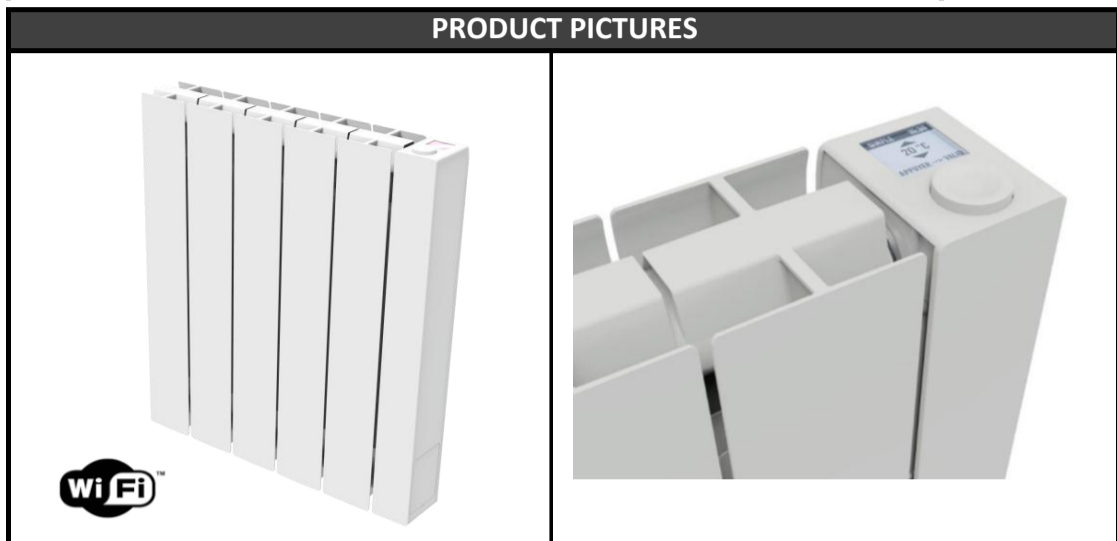

TECHNICAL DESCRIPTION	
MATERIAL	Aluminum
FLUIDIE TYPE	Mineral oil
COLOR	White RAL9010
HEATING ELEMENT	Constant power, safety thermostat, thermal fuse
THERMOSTAT	Electronic, backlighted
WALL FIXATION	Included
IP GRADE	IP24
ELECTRIC INSULATION	CLASS II


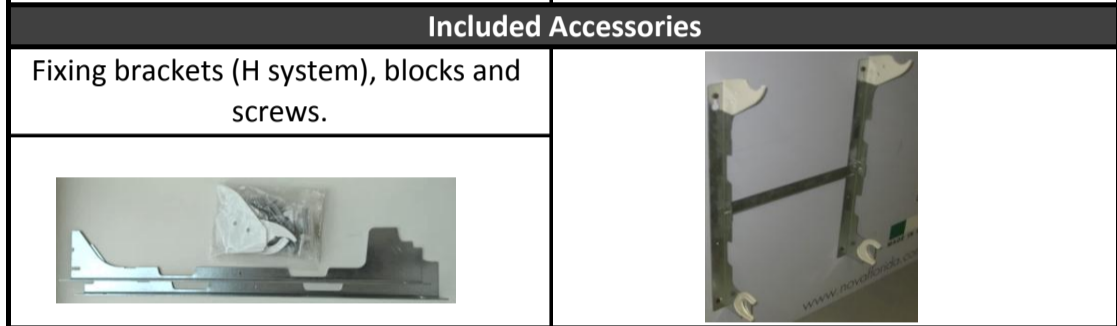


FUNCTIONS	
ON / OFF SWITCH	Yes
DISTANCE CONTROL	Yes (Wi-Fi + APP)
PROGRAMMING CONTROL	Weekly and daily
CLOCK BACK-UP	> 2 h
PILOT WIRE 6 ORDERS	Yes
SMART FUNCTIONS	Window opening function Consumption metering Adaptive control of start-up
OTHER FUNCTIONS	Menu-driven user interface

Model	Output	Thickness	Height	Lenght	Net weight	Nr. of elements
eBlitz Wi-Fi	W	mm	mm	mm	Kg	
750 W	750	80	583	390	8	4
1000 W	1000	80	583	470	9,9	5
1250 W	1250	80	583	630	13,7	7
1500 W	1500	80	583	790	17,1	9
1800 W	1800	80	583	950	19,7	11

CABLE		
110 cm lenght	L + N + Pilot Wire	

INSTRUCTION BOOK		
IST 03 F 106 -01		A4 FORMAT
Italian	German	English
IST 03 F 108 -01		A4 FORMAT
French	Spanish	Portuguese

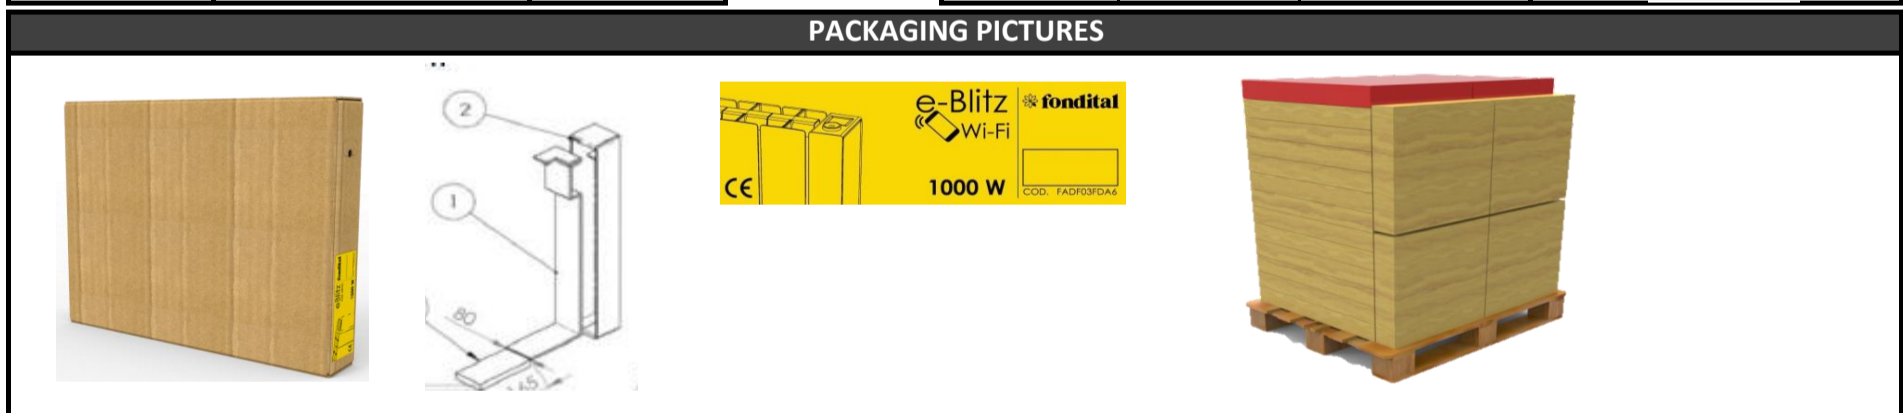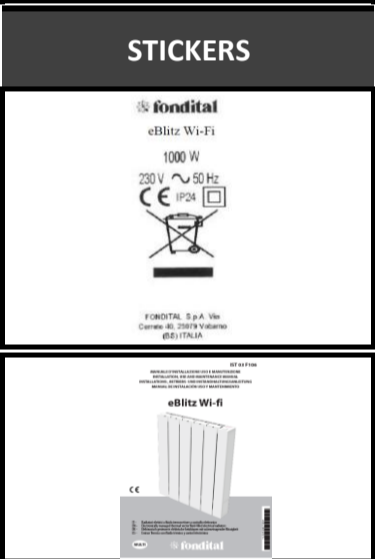

WI-FI REMOTE CONTROL

APP "Domus One"

Wi-Fi 2,54 GHz, with the following network protection methods:

- WPA-PSK
- WPA2-PSK
- open network (no security implemented).

Not supported any other method, such as WEP (system that still use WEP aren't secure).
Wi-Fi SSID network names and passwords cannot exceed 50 characters.